


## flex7 Sensor Link & Switch Drop Leads

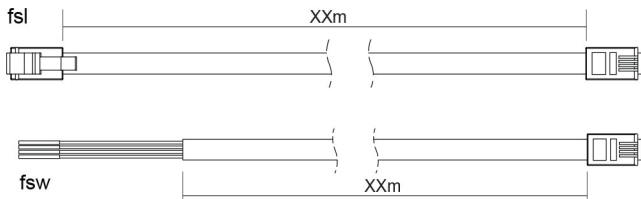

### Lengths

Comes in lengths up to 50 metres, refer to price list.

### Rating

|                             |  |
|-----------------------------|--|
| <b>Connector:</b>           | 4P4C modular jack, RJ11 style<br>4 way 28 a.w.g. (7×0.12mm) Cu |
| <b>Test Standard:</b>       | EN50289, UL 1581, UI758  |
| <b>Insulation Material:</b> | Solid Polyethylene   |
| <b>Insulation diameter:</b> | 0.95(+/-0.1 0) mm×4  |
| <b>Jacket External:</b>     | 2.45(+/-0.15)mm×4.95(+/-0.20)                                  |
| <b>Jacket Material:</b>     | FR-PVC(complies RoHS)  |

Max. Conductor DC Resistance at 20°C ( $\Omega$ /100M) **16.73**

Min. Insulation DC Resistance at 20°C (M $\Omega$ ) **200**

**Rated Temperature:** 80°C

**Rated Voltage:** 500V