


# Special Double Extender Leads (including 7-core leads)

These Special Double Extender Leads are available specifically to work with and complement the Special Pre-wired Luminaire Leads and Single Extender Leads on page 27 & 28.

DALI Leads

## 5 & 6-Core Double Extender Leads for DALI control\*



Caution: only use 5-core if there are no emergency fittings in the run. Otherwise use 6-core throughout.

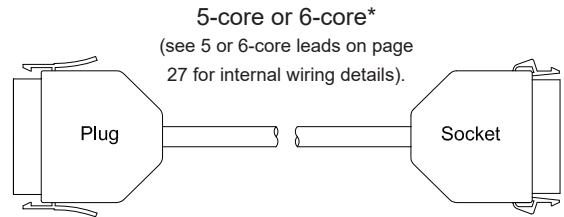

Switch Dim™ Leads

## 4 & 5-Core Double Extender Leads for Switch Dim™ (or equivalent) ballasts\*.


Caution: only use 4-core if there are no emergency fittings in the run. Otherwise use 5-core throughout.

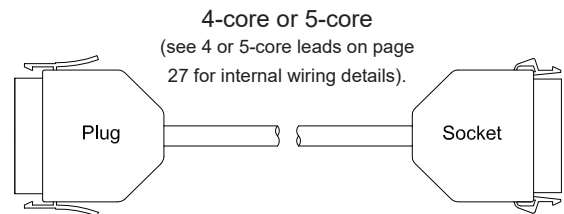



7-core

## 7-Core Double Extender Leads

For special luminaire applications (please see note 1 below).

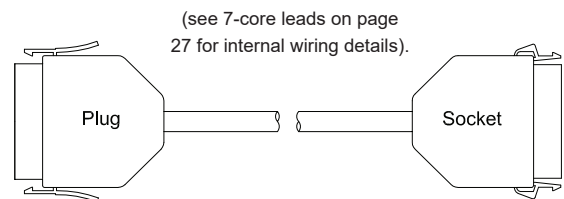

Note 1: All terminals on flex7 plugs and sockets are 230V~ 16A rated, but wherever possible we advise adherence to the following flex7 adopted standard of terminal designations. Please exercise care if deviating from these, as cross connection with a standard flex7 installation/product, present or future, may result in personal injury or damage to other equipment.

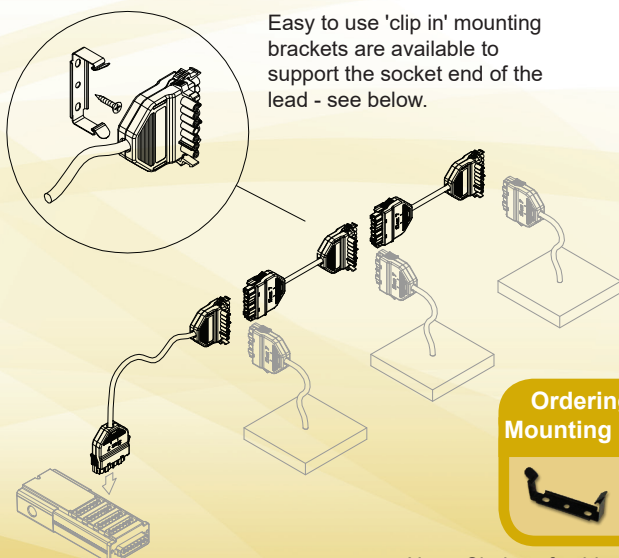

Easy to use 'clip in' mounting brackets are available to support the socket end of the lead - see below.

### Ordering flex7 Mounting Brackets



### Ordering flex7 Special Double Extender Leads

	LSHF	LSHF cable	1, 2, 3, 4, 5 (length in metres)		
DALI 5-Core		fd5150	<input type="text"/>	<input type="text"/>	/bd
DALI 6-Core		fd6150	<input type="text"/>	<input type="text"/>	/bd
Switch Dim 4-Core		fd4150	<input type="text"/>	<input type="text"/>	/bt
Switch Dim 5-Core		fd5150	<input type="text"/>	<input type="text"/>	/bt
7-Core Leads		fd7150	<input type="text"/>	<input type="text"/>	/b

Double extenders are only available with black plug/skts

Other cable lengths may be available to special order.

Note: Choice of cable csa, cable length and any cable calculations are the sole responsibility of the installer.