


## 3, 4 & 7-Pole Single Socket Outlets

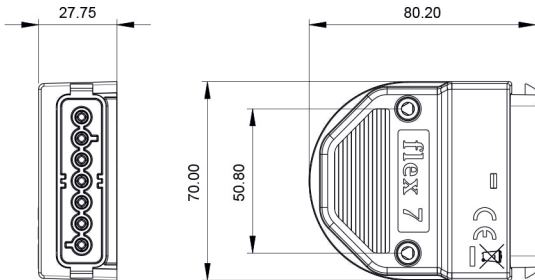

All measurements are in millimetres

### Rating

**Supply Voltage:** 230V~ 16A

Tested to BS5733

**Conformity:** LVD-2006/95/EC

Manufactured in black, red, or white PA6 UL94 V-0 rated.


3, 4 or 7 contacts per socket.

Terminals accept 1x 10.00mm<sup>2</sup>, 2x 4.00mm<sup>2</sup> or 3x 2.50mm<sup>2</sup> conductors.

3 & 4 contact versions are fitted with an additional looping terminal.

50.80mm / 2" fixing centres for standard round conduit box mounting.

Available in 3-pin White, 4-pin Red or 7-pin Black

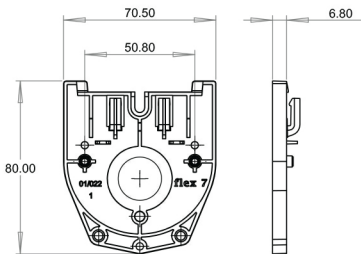

### Note:

Trunking mount plates supplied with 3 or 4-pole sockets have a 20mm Ø hole whilst 7-pole have a 25mm Ø

All measurements are in millimetres