



2-Pole Auxiliary Adaptor Unit Plugs

The plug used with the flex7 2-Pole Auxiliary Adaptor Unit is pale blue as standard, and is supplied complete with a white strain relief and integral cord grip. On mating with the socket it latches in place ensuring it is only disconnected when required. Both terminals are numbered and each will accept 1 x 1.50mm² conductor

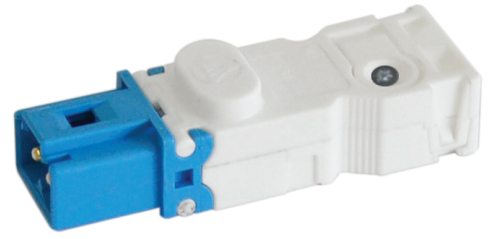

2-Pin Plug

2-Pin



Ordering flex7 2-Pole Auxiliary Adaptor Plug



fa2/bl

2-Pole Auxiliary Adaptor Unit Pre-wired Leads


To save valuable time on site the flex7 2-Pole Auxiliary Adaptor Plug can be pre-wired with LSHF 2-core flexible cable or twisted control cable (unscreened). The free end of the lead is stripped and conductors are ferruled ready for connection into the terminals of the luminaire/device.



2-Pin Pre-wired Plug

LSHF flexible cable.


2-Pin



2-Pin Pre-wired Plug

LSHF Twisted control cable (unscreened).

2-Pin



Ordering flex7 2-Pole Auxiliary Adaptor Leads

lshf LSHF flexible cable
beld LSHF Twisted Control Cable

150 1.50mm²*

1, 2, 3, 4, 5
(length in metres)

fa2 [] [] [] /bl

*LSHF twisted control cable conductors are 16awg which is the equivalent of 1.31mm².