
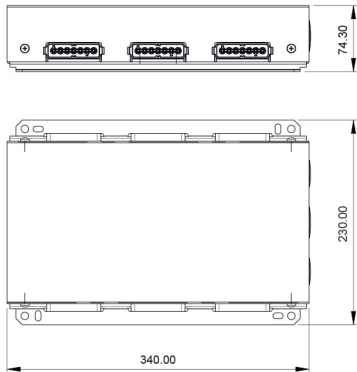


Hub Units



All measurements are in millimetres

Rating

Supply Voltage: 400V~ 16A,

Tested to BS5733

Conformity: LVD-2006/95/EC

230V~ 16A per outlet

Manufactured in black 1.20mm - 2.00mm thick mild steel.

1-hole 32mmØ centre and 2-holes 25mmØ for cable entry.

Terminals accept 1 x 10.00mm², 2 x 4.00mm² or 3 x 2.50mm² conductors.