


Dimensions

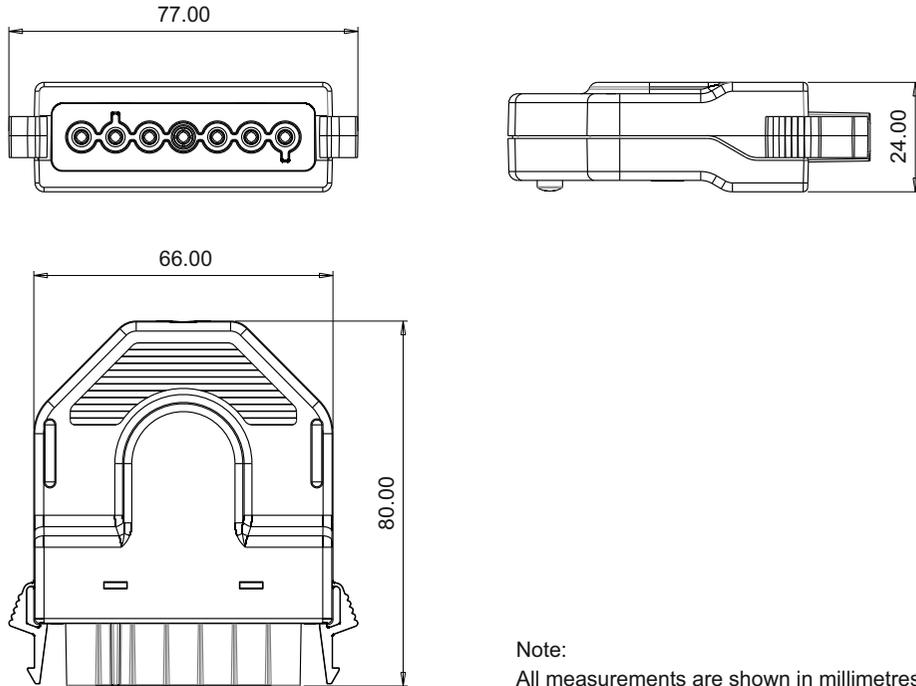


Note:
All measurements are shown in millimetres

Supply Voltage : Nominal 230V~ 16A
Material: PA6 UL94 V-0 rated, Non-halogen
 Black, Red or White.
Operating range :-10°C to 40°C
IP Rating :IP20
Max cord grip :11.50mmØ
Compliance :2014/35/EU

Terminals accept single conductors from
 0.50mm² to 4.00mm²
 3 to 7 contacts per socket, each rated at 16A,
 using flex 7 socket format.


Pre-wired leads in LSHF to BS EN 50525-3-11
 1.00mm² to 1.50mm², 3 to 7-cores

fs - Sockets

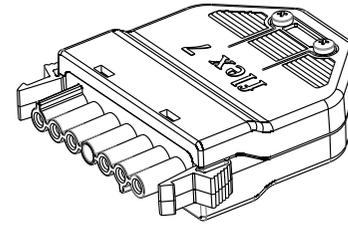


Wiring information

Standard 3-pole flex7 socket

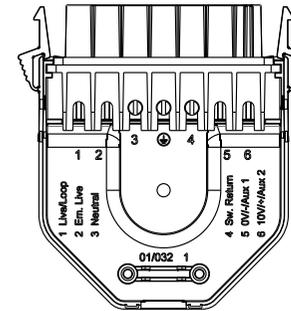


Terminal	Connections
1
2
3 Neutral
⊕ Earth
4 Sw. Return
5
6

Standard 4-pole flex7 socket

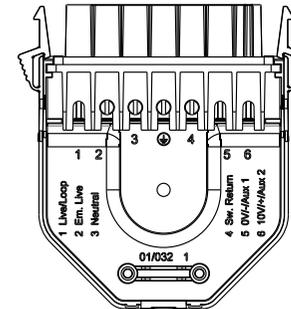

Terminal	Connections
1
2 Em. Live
3 Neutral
⊕ Earth
4 Sw. Return
5
6

Standard 7-pole flex7 socket

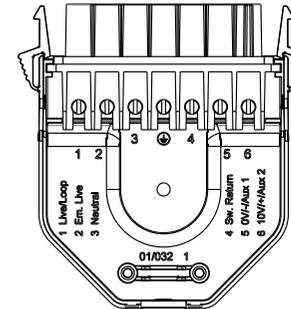

Terminal	Connections
1 Live / Loop
2 Em. Live
3 Neutral
⊕ Earth
4 Sw. Return
5 0V/ - /Aux 1
6 10V/ + / Aux 2



flex7 Limited, Ruscombe Business Park, Ruscombe Lane, Twyford, Berkshire RG10 9JW, UK
 Telephone: +44 (0) 20 8580 1066 Fax: +44 (0) 20 8580 1062
 Website: www.flex7.co.uk Email: info@flex7.co.uk
 Leaflet reference number: 22/080 issue 3 19/02/2025

