


# ZoneLite Units

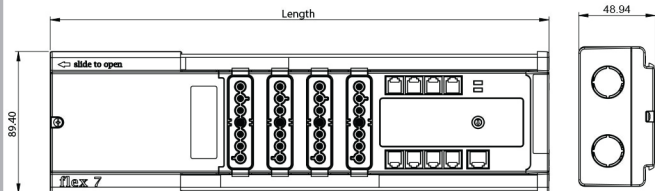

## ZoneLite unit length

4 way outlet:	315mm
16 way outlet:	615mm
20 way outlet:	715mm

All measurements are in millimetres

## Rating

Nominal 230V~ 16A, 50Hz, Class 1

Manufactured in black PA6 UL94 V-0 rated, PC/ABS, and Anodised Aluminium.

7 contacts per outlet each rated at 16 amps, using the flex7 outlet format.

Total system rating: 16A.

Operating range: -10°C to 40°C

IP20

Incoming terminals accept 3 x 2.50mm<sup>2</sup>, 2 x 4.00mm<sup>2</sup> or 1 x 6.00mm<sup>2</sup> conductors.

## **Load (per channel)**

Fluorescent & incandescent lighting : 6A

Compact fluorescent lighting : 3A

## **Maximum number of ballasts (per channel):**

DSI Digital control : 25

DALI Digital control : 25

Compliance: LVD-2006/95/EC & EMC-2004/108/EC